



#8017 SERIES DOUBLE HUNG 4 11/16" VINYL JAMB TILT WINDOW

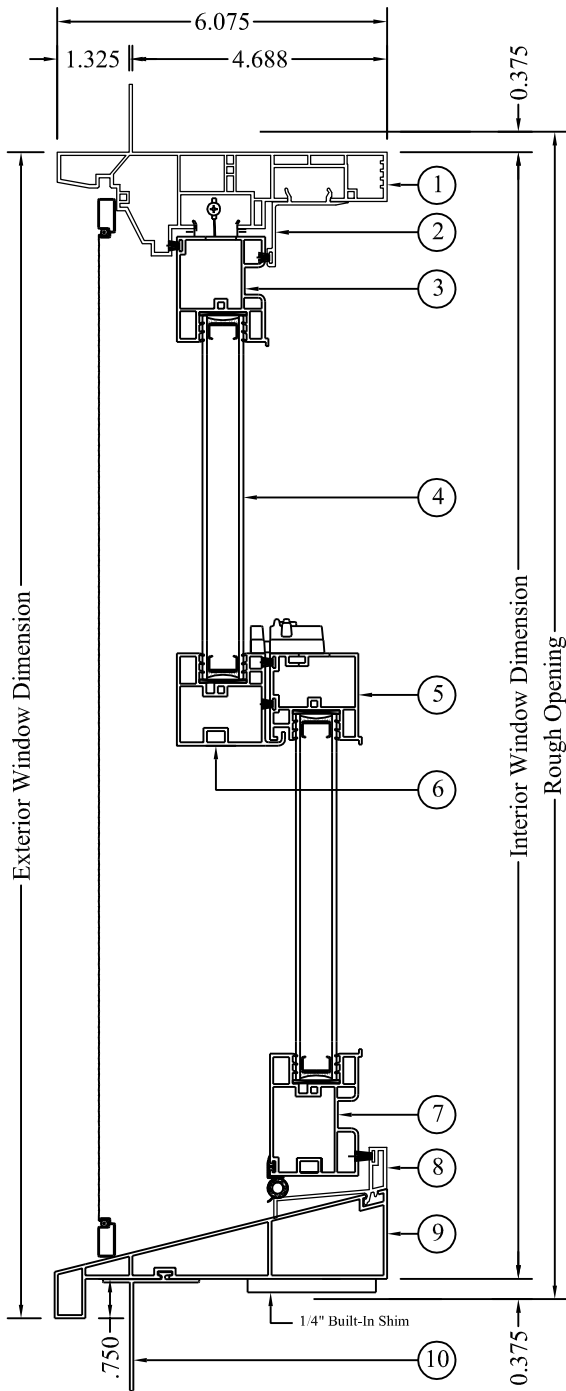

- | | |
|---------------------------|-----------------------------|
| 1. Main Frame Head M-1323 | 7. Lift Rail M-8002 |
| 2. Head Insert M-393 | 8. Sill Tower M-405-1 |
| 3. Pull Rail M-8022 | 9. Main Frame Sill M-402 |
| 4. 3/4" Insulating Glass | 10. Aluminum Nail Fin A-127 |
| 5. Lock Rail M-8004 | 11. Main Frame Jamb M-1323 |
| 6. Keeper Rail M-8003 | 12. Sash Vertical M-8000 |

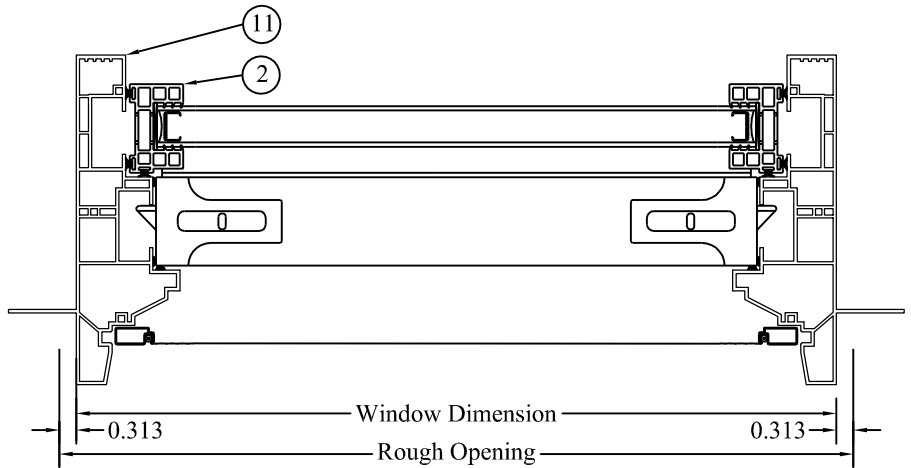

SPECIFICATIONS

Size Tested: AAMA101/I.S.2/A440-05 H-R40, 36" x 72"
Profiles: Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.
Fasteners: All screws and fastening devices shall be coated with Zinc or Cadmium.
Glass & Glazing: Overall 3/4" thick sealed insulating unit. Top and Bottom Vents are tilt type pocket sash mechanically fastened.
Weather-Stripping: All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.
Finish: Members shall have an integral White, Tan or Earth-Tone color throughout the profile.
Hardware: All hardware components that come in contact with PVC shall be non-corrosive material.
Screens: All shall be half window type sufficient to cover the opening provided by the vent sash. Screen frames are 5/16" x 3/4" rolled formed aluminum. Screen fabric shall be 18x16 fiberglass mesh.