
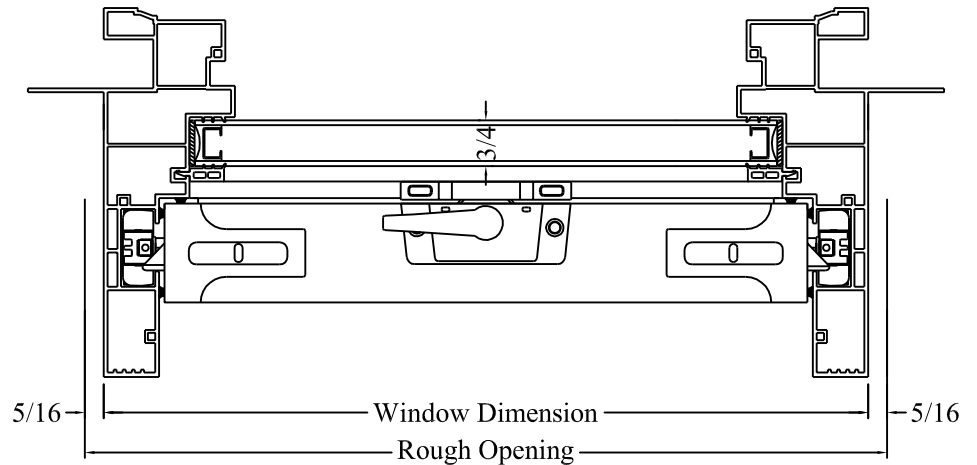


SERIES #5610 SINGLE HUNG VINYL TILT WINDOW

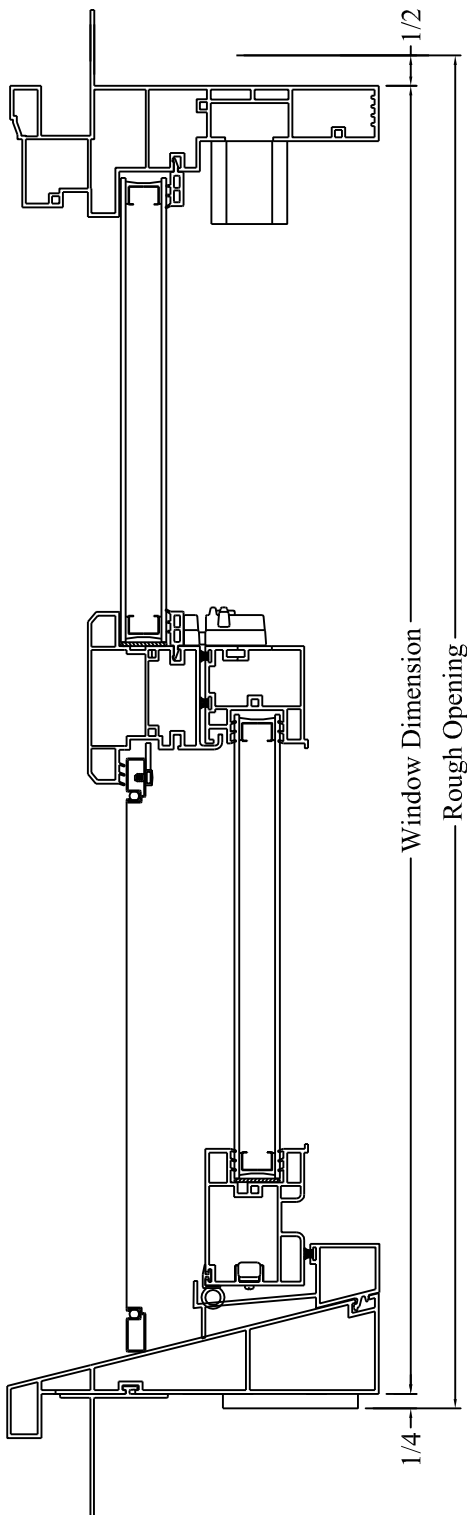

SPECIFICATIONS

Size Tested: AAMA/WDMA/CSA 101/I.S.2/A440-05 H-R40 (44"x63").

Profiles: Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.

Fasteners: All screws and fastening devices shall be coated with Zinc or Cadmium.

Glass & Glazing: Overall 5/8" thick sealed insulating unit. Top glass interior drop, secured with perimeter bead. Vent is tilt type pocket sash mechanically fastened.

Weather-Stripping: All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.

Finish: Members shall have an integral White, Tan or Earth-Tone color throughout the profile.

Hardware: All hardware components that come in contact with PVC shall be non-corrosive material.

Screens: All shall be half window type sufficient to cover the opening provided by the vent sash. Screen frames are 5/16" x 3/4" rolled formed aluminum. Screen fabric shall be 18x16 fiberglass mesh.