
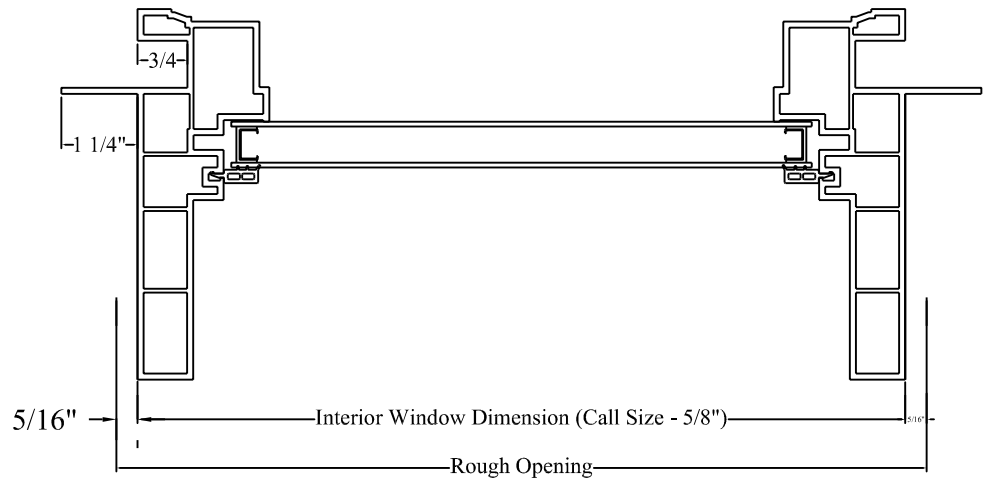


MGM Industries, Inc.

12/07

SERIES #5665 Fix Picture Window

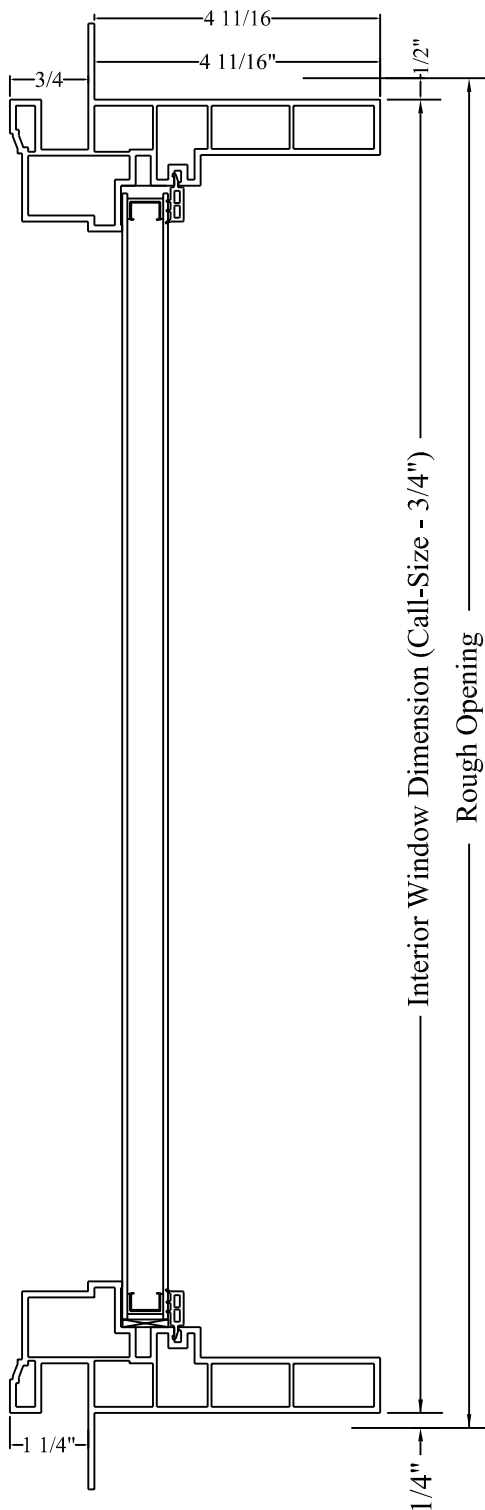

SPECIFICATIONS

Size Tested: AAMA/WDMA/CSA 101/I.S.2/A440-05 FW-C65 (6050), FW-R65 (4070) .

Profiles: Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.

Fasteners: All screws and fastening devices shall be coated with Zinc or Cadmium.

Glass & Glazing: Overall $\frac{3}{4}$ " thick sealed insulating unit. Glass direct set silicone sealed, secured with drive in perimeter bead.

Weather-Stripping: N/A

Finish: Members shall have an integral White, Tan or Earth-Tone color throughout the profile.

Hardware: N/A

Screens: N/A