
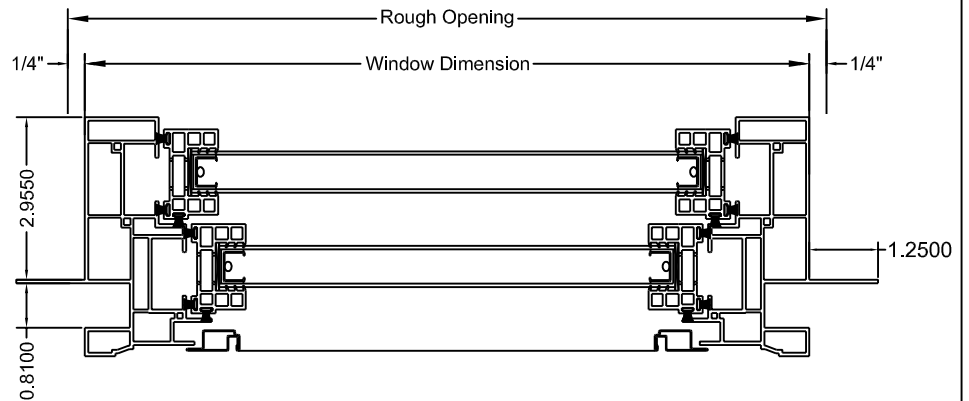


MGM Industries, Inc.

2/08

SERIES #7010 DOUBLE HUNG VINYL TILT WINDOW

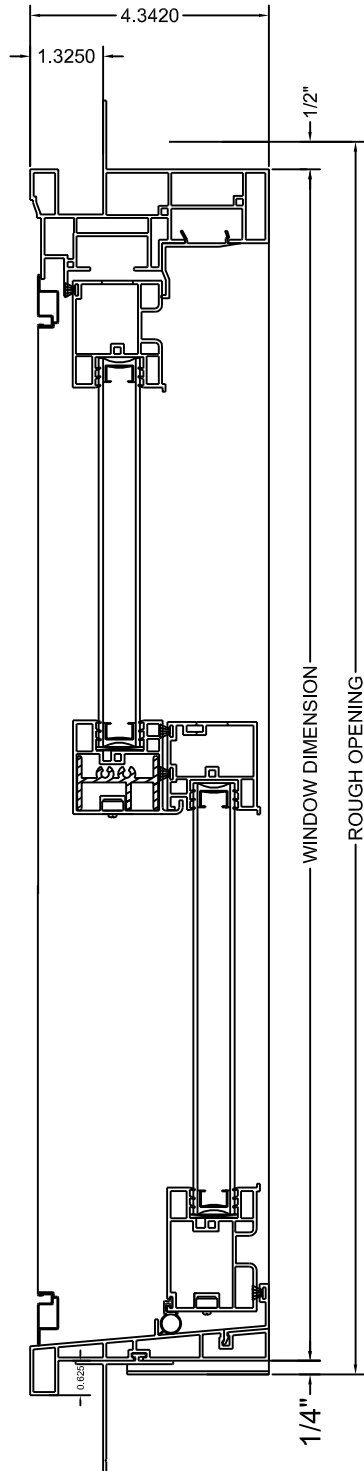

SPECIFICATIONS

Size Tested: AAMA101/I.S.2/A440-05 H-R25, 44" x 63"

Profiles: Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.

Fasteners: All screws and fastening devices shall be coated with Zinc or Cadmium.

Glass & Glazing: Overall 3/4" thick sealed insulating unit. Top and Bottom Vents are tilt type pocket sash mechanically fastened.

Weather-Stripping: All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.

Finish: Members shall have an integral White, Tan or Earth-Tone color throughout the profile.

Hardware: All hardware components that come in contact with PVC shall be non-corrosive material.

Screens: All shall be half window type sufficient to cover the opening provided by the vent sash. Screen frames are 5/16" x 3/4" extruded aluminum. Screen fabric shall be 18x16 fiberglass mesh.