



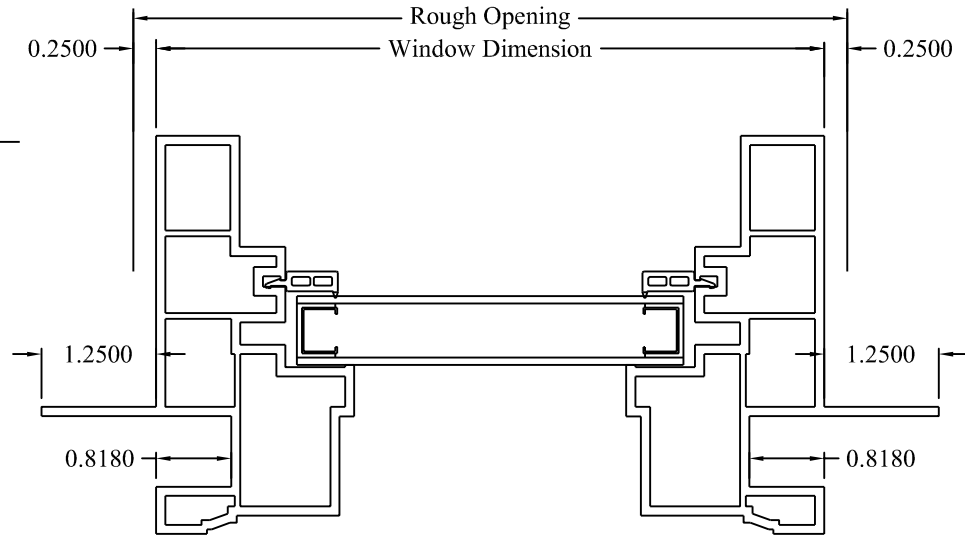

#7010 SERIES PICTURE WINDOW

VINYL FIX WINDOW

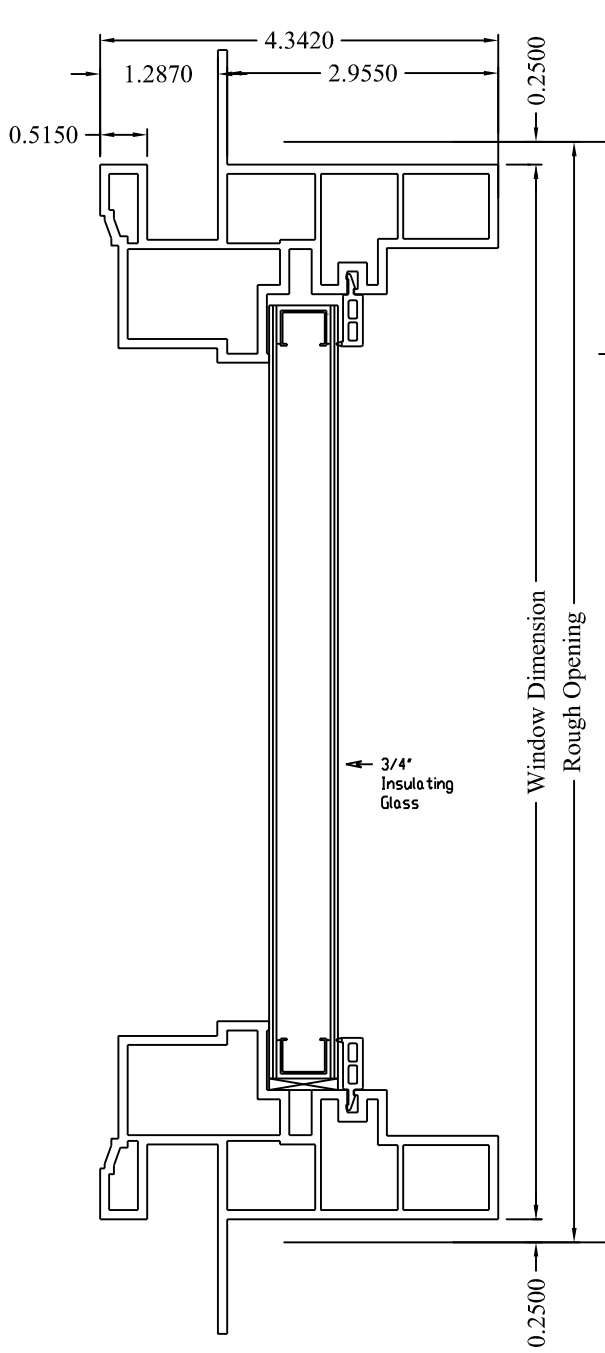

SPECIFICATIONS

Size Tested: AAMA/NWDA 101/I.S.2.A440-05, H-R55, 44" x 64"	
Profiles:	Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.
Fasteners:	All screws and fastening devices shall be coated with Zinc or Cadmium.
Glass & Glazing:	Overall 3/4" thick sealed insulating unit. Top glass interior drop into silicone, secured with perimeter bead. Vent is welded tilt type, glass is exterior drop into silicone.
Weather-Stripping:	All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.
Finish:	Members shall have an integral White, Tan or Earth-Tone color throughout the profile.
Hardware:	All hardware components that come in contact with PVC shall be non-corrosive material.
Screens:	N/A