



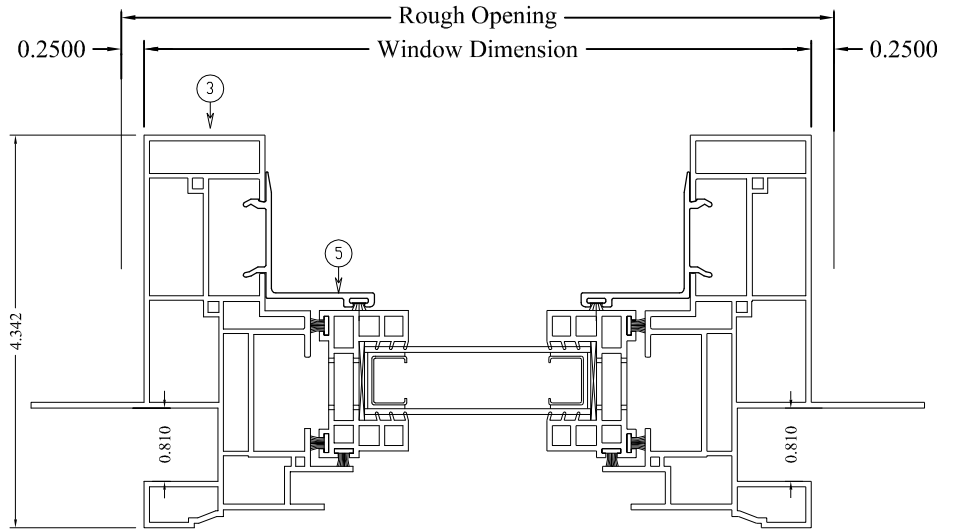

#7010 SERIES PICTURE WINDOW with Sash

VINYL FIX WINDOW

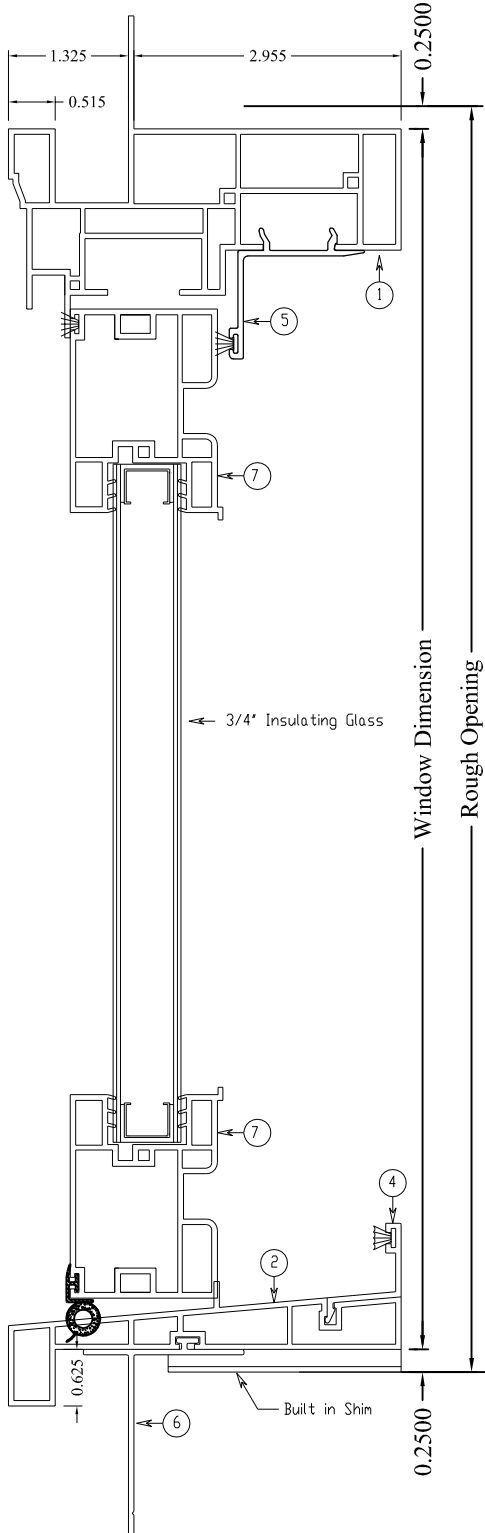

- | | |
|---------------------|------------------------------|
| ① M-7003 FRAME HEAD | ⑤ M-393 HEAD INSERT |
| ② M-7004 FRAME SILL | ⑥ A-127 ALUMINUM NAILING FIN |
| ③ M-7003 FRAME JAMB | ⑦ M-8002 SASH HORIZONTAL |
| ④ M-7007 SILL TOWER | ⑧ M-8000 SASH VERTICAL |

SPECIFICATIONS

Size Tested: AAMA/NWWDA 101/I.S.2.A440-05, H-R25, 44" x 64"
Profiles: Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized, rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.
Fasteners: All screws and fastening devices shall be coated with Zinc or Cadmium.
Glass & Glazing: Overall 3/4" thick sealed insulating unit. Top glass interior drop into silicone, secured with perimeter bead. Vent is welded tilt type, glass is exterior drop into silicone.
Weather-Stripping: All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.
Finish: Members shall have an integral White, Tan or Earth-Tone color throughout the profile.
Hardware: All hardware components that come in contact with PVC shall be non-corrosive material.
Screens: N/A