
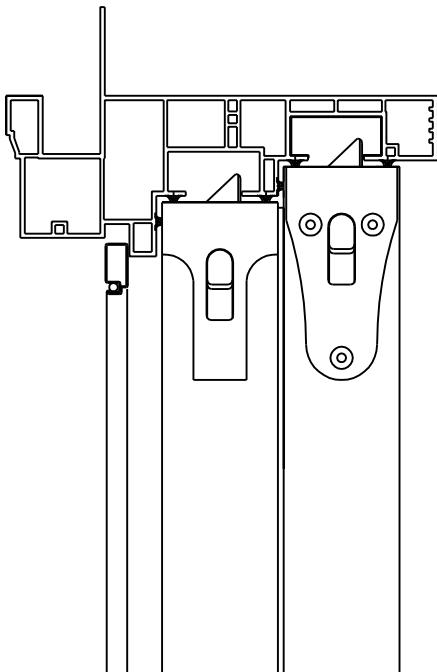


# MGM

INDUSTRIES

## #8065 SERIES SINGLE HUNG VINYL TILT WINDOW

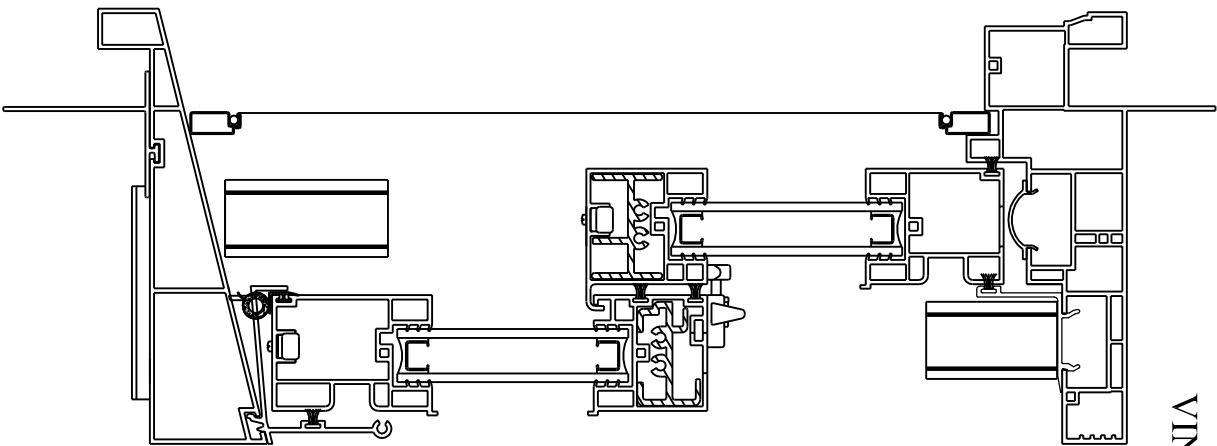

### SPECIFICATIONS

<b>Size</b> Tested: AAMA/NWDA 101/1.S.2.A440-05, H-R65, 44" x 63"
<b>Profiles:</b> Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.
<b>Fasteners:</b> All screws and fastening devices shall be coated with Zinc or Cadmium.
<b>Glass &amp; Glazing:</b> Overall 3/4" thick sealed insulating unit. Mechanically fastened pocket sash.
<b>Weather-Stripping:</b> All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.
<b>Finish:</b> Members shall have an integral White, Tan or Earthtone color throughout the profile.
<b>Hardware:</b> All hardware components that come in contact with PVC shall be non-corrosive material.
<b>Screens:</b> All shall be full window type sufficient to cover the opening provided by the vent sash(s). Screen frames are 5/16" x 3/4" rolled formed aluminum. Screen fabric shall be 18x16 fiberglass mesh.