



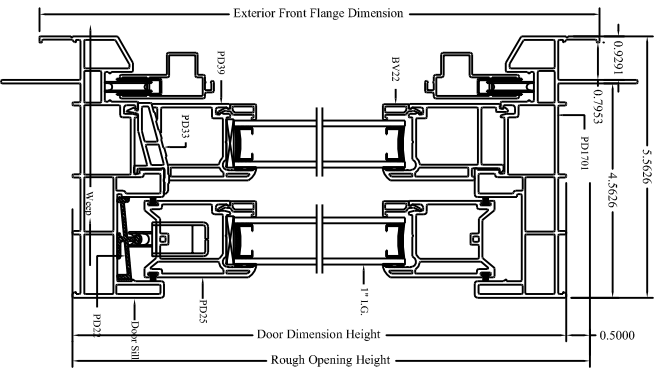

# #9050 SERIES PATIO DOOR

## VINYL SLIDING GLASS DOOR

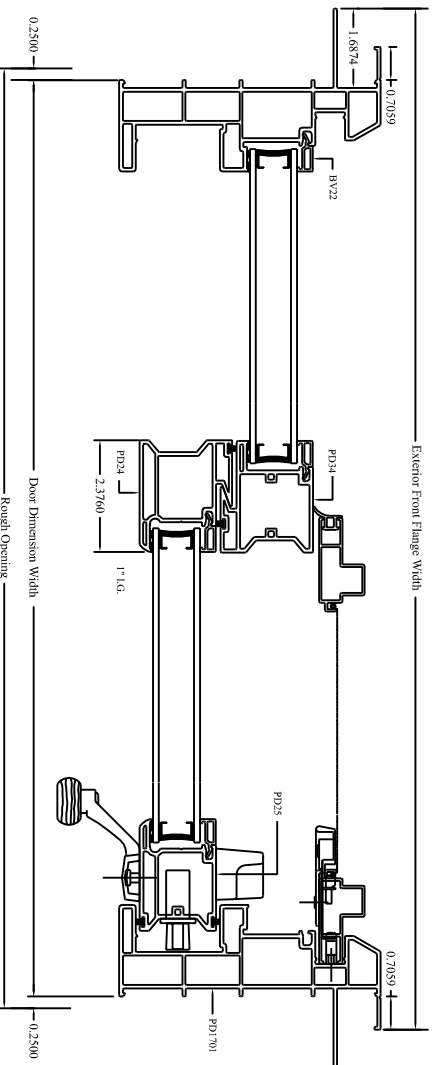

### SPECIFICATIONS

<p><b>Size Tested:</b> AAMA/NWDA 101/I.S.2.A440-05, SGD-R50, 6068</p>
<p><b>Profiles:</b> Main frame and sash components shall be constructed of extruded, high-impact-resistant and UV-stabilized rigid polyvinyl chloride (PVC). Main frame shall be of multi-chambered design. Typical wall for extruded frame and sash shall be .062" or as indicated on the extrusion die drawings.</p>
<p><b>Fasteners:</b> All screws and fastening devices shall be coated with Zinc or Cadmium.</p>
<p><b>Glass &amp; Glazing:</b> Overall 1" thick sealed insulating unit. Glass is drop into silicone, secured with perimeter bead. Vent is fusion weld.</p>
<p><b>Weather-Stripping:</b> All window gaps between main frame and sash members shall be weather-stripped to prevent air infiltration. Weather-strip shall be poly pile type with an integral polyethylene fin.</p>
<p><b>Finishes:</b> Members shall have an integral White or Tan color throughout the profile.</p>
<p><b>Hardware:</b> All hardware components that come in contact with PVC shall be non-corrosive material.</p>
<p><b>Screens:</b> All shall be half window type sufficient to cover the opening provided by the vent sash. Screen frames are 5/16" x 3/4" rolled formed aluminum. Screen fabric shall be 18x16 fiberglass mesh.</p>